


Item Description	IP	IK	Ta (°C)	KG	L (mm)	W (mm)	H (mm)
LED Waterproof Housing IP65 60cm 1x18W	IP65	IK08	-25 ~ +40	0.63	665	70	84
LED Waterproof Housing IP65 60cm 2x18W	IP65	IK08	-25 ~ +40	0.76	665	95	84
LED Waterproof Housing IP65 120cm 1x36W	IP65	IK08	-25 ~ +40	1.1	1275	70	84
LED Waterproof Housing IP65 120cm 2x36W	IP65	IK08	-25 ~ +40	1.35	1275	95	84
LED Waterproof Housing IP65 150cm 1x58W	IP65	IK08	-25 ~ +40	1.3	1575	70	84
LED Waterproof Housing IP65 150cm 2x58W	IP65	IK08	-25 ~ +40	1.7	1575	95	84

Dimensions

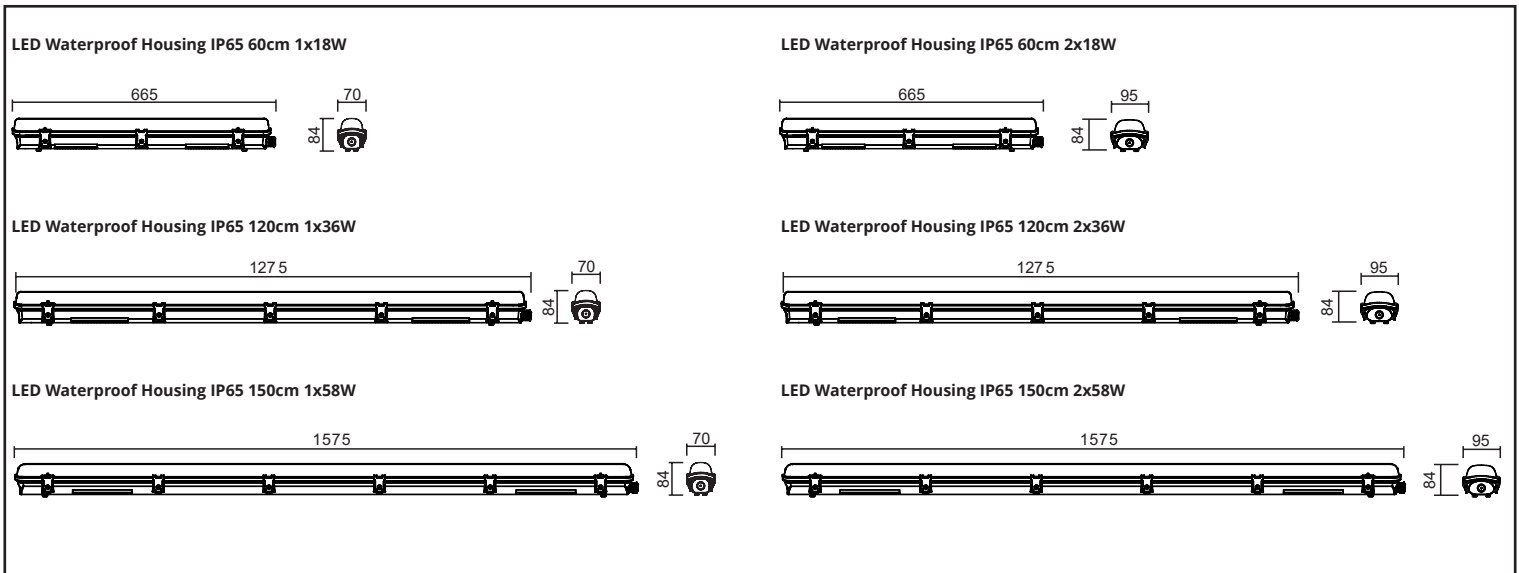

Installation

1

2




Item Description	L1 (mm)
LED Waterproof Housing IP65 60cm 1x18W	330
LED Waterproof Housing IP65 60cm 2x18W	330
LED Waterproof Housing IP65 120cm 1x36W	840
LED Waterproof Housing IP65 120cm 2x36W	840
LED Waterproof Housing IP65 150cm 1x58W	1120
LED Waterproof Housing IP65 150cm 2x58W	1120

3a



3b

4

5

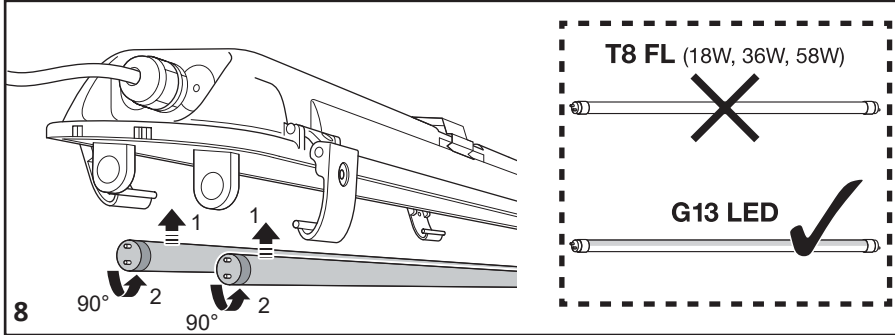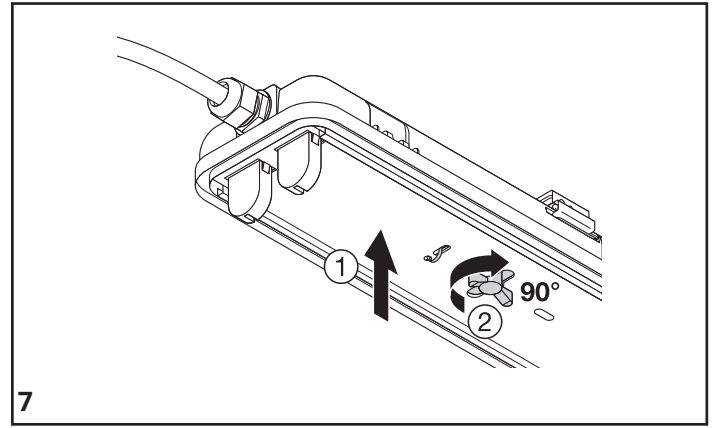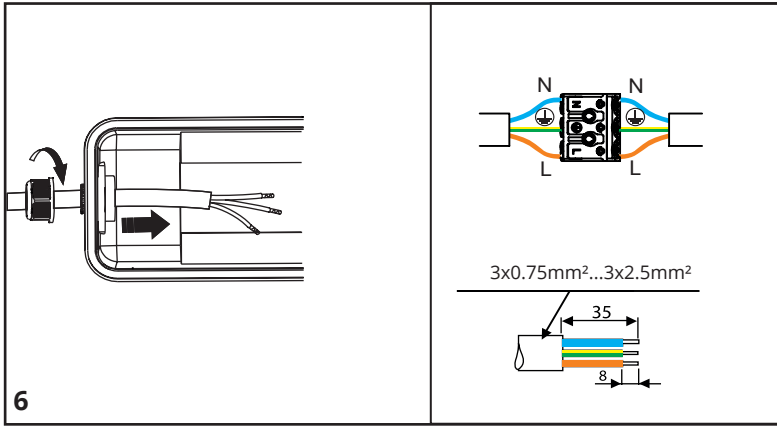

Item Description	220-240V/50-60Hz
LED Waterproof Housing IP65 60cm 1x18W	1xG13 LED Tube (600mm)
LED Waterproof Housing IP65 60cm 2x18W	2xG13 LED Tube (600mm)
LED Waterproof Housing IP65 120cm 1x36W	1xG13 LED Tube (1200mm)
LED Waterproof Housing IP65 120cm 2x36W	2xG13 LED Tube (1200mm)
LED Waterproof Housing IP65 150cm 1x58W	1xG13 LED Tube (1500mm)
LED Waterproof Housing IP65 150cm 2x58W	2xG13 LED Tube (1500mm)

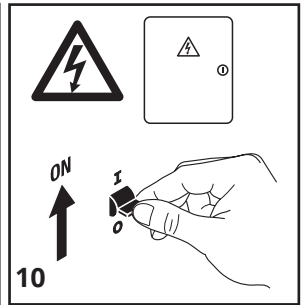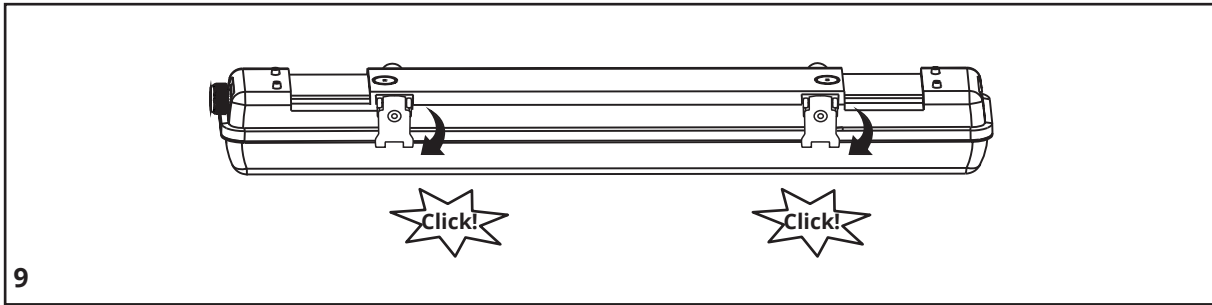

Warning

- Only qualified electrician is allowed to do installation, maintenance and inspection for safety concern. It is dangerous for non-professional operators.
- Power should be cut off before installation, maintenance or inspection.
- Please install and use the product strictly according to the instruction.
- Do not disassemble or remold the product at will to avoid accident of electric shock or light falling.
- Working out of temperature range of -25 ~ +40°C will shorten the lifetime of the product.

