

LED WATERPROOF



KEY FEATURES

- Professional IP65 Waterproof fixture with slim design including Through-wiring 3x1.5mm²
- IP65 Dust and waterproof
- IK08 Vandal resistant / impact resistant polycarbonate housing and diffuser
- Integrated LED strips with a long lifespan of 76,000 hours
- Included Premium Philips LED Driver
- 2x M20 (8-12mm) cable glands mounted
- Easy linkable
- Mounting brackets slidable from end to end
- Supplied with mounting brackets, hanging hook and anti-vandalism screws
- 5 year Pragmalux Warranty

IP65 IK08  850°GWT 127LM/W  THROUGH-WIRING 3X1.5MM²  120° 

5 WARRANTY

DETAILS



2xM20 - Fast connector



Adjustable ceiling clips

OPTIONS

6500K

TECHNICAL DATA

ELECTRICAL DATA

Voltage (V)	220-240
Frequency (Hz)	50/60
Power factor (λ)	≥0.9
Operating mode	Integrated LED Driver
Electrical connection	Max 3x1,5 mm ² wire
Total harmonic distortion	≤ 20 %

TEMPERATURES & OPERATING CONDITIONS

Ambient temperature	25°C
Operating temperature	-25 ~ +40°C
Storage temperature	-25 ~ +60°C

COLORS & MATERIALS

Color (Housing)	Grey RAL7035
Material (Housing)	PC
Material (Reflector)	PC

CERTIFICATES & STANDARDS


Driver certificates	CE / ENEC
Fixture certificates	CE / ENEC
Ingress protection	IP65
Protection class	I
Protection class IK	08
Glow Wire Test (IEC 695-2-1)	850°C
Photobiological safety group EN62778	RG0

CAPABILITIES

UGR	≤25
Dimmable	No
Type of connection	Push Terminal, 3-pole
LED Module replacable	No
Installation	Through-wiring possible


LED WATERPROOF

DIMENSIONS

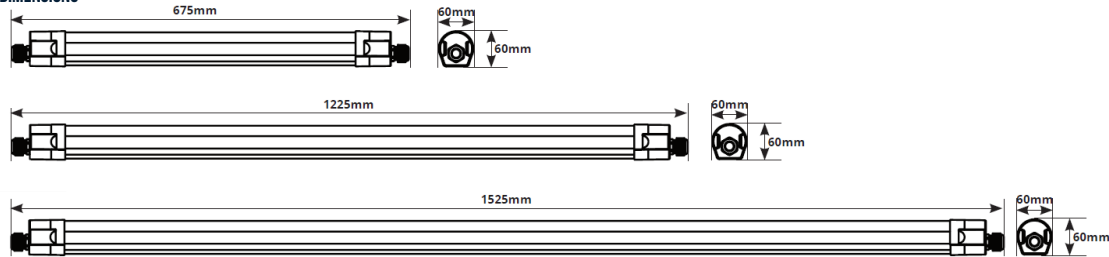


PHOTOMETRIC SPECIFICATIONS


LED WATERPROOF SLIM IP65 19W 600 4000K

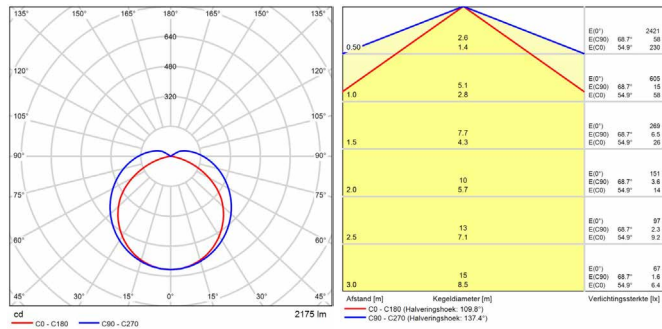


LED WATERPROOF SLIM IP65 35W 1200 4000K

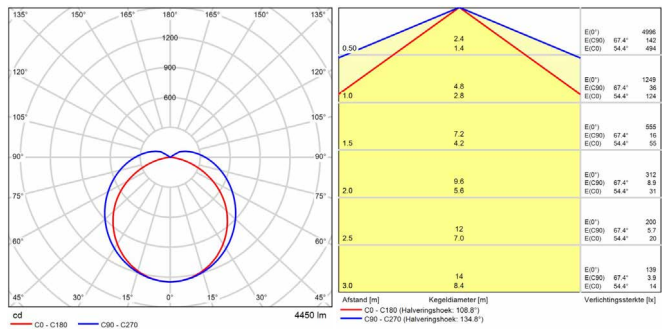

LED WATERPROOF SLIM IP65 50W 1500 4000K

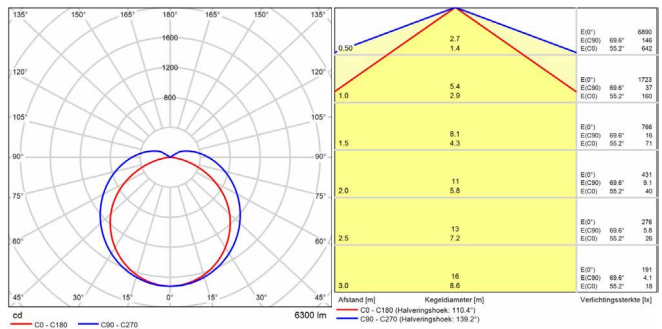

LED WATERPROOF SLIM IP65 18W 1200 4000K

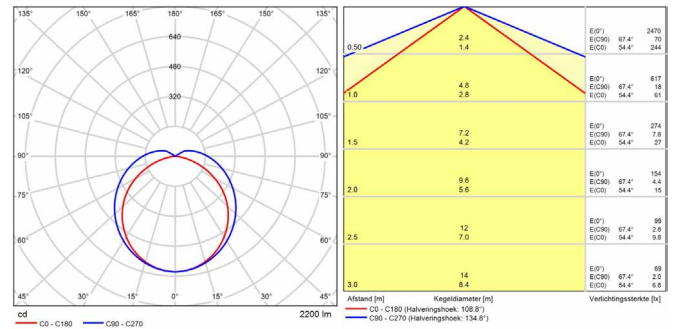

LED WATERPROOF SLIM IP65 30W 1500 4000K

